

SRK

250S



Engine

TYPE	SINGLE CYLINDER, 4-VALVE, 4-STROKE
BORE X STROKE (MM)	72.0 X 61.2
DISPLACEMENT (CC)	249
MAX. POWER	20.5KW @ 9,500RPM
MAX. TORQUE	22.5NM @ 7,250RPM
FUEL SYSTEM	EFI
STARTING SYSTEM	ELECTRIC
CLUTCH	WET, MULTI-PLATE
TRANSMISSION	6-GEAR, CHAIN

CHASIS

FRONT SUSPENSION	TELESCOPIC UPSIDE DOWN
REAR SUSPENSION	ADJUSTABLE MONOSHOCK
FRONT TYRE	110/60-R17
REAR TYRE	140/60-R17
FRONT & REAR BRAKE	DISC, ABS

DIMENSIONS

L X W X H (MM)	2,010 X 810 X 1,070
WHEELBASE (MM)	1,370
SEAT HEIGHT (MM)	780
GROUND CLEARANCE (MM)	135
DRY WEIGHT (KG)	148
FUEL TANK CAPACITY (L)	12.5

COLOUR OPTIONS




BLACK



GREY

*Specifications and features are subject to change without prior notice.

SRK
250S

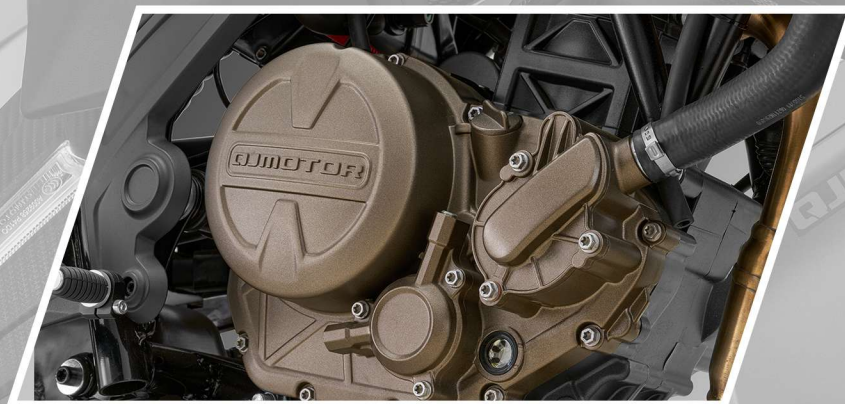

ENGINE 249CC, SINGLE CYLINDER, 4-VALVE, 4-STROKE

MAXIMUM POWER: 20.5KW@9,500RPM

MAXIMUM TORQUE: 22.5NM@7,250RPM



DUAL CHANNEL ABS

FRONT BRAKE: 300MM, DISC

REAR BRAKE: 240MM, DISC



LED SIGNAL INDICATOR

TRIGGERS A CHANGE IN DIRECTION OR POSITION.



HAZARD BUTTON

ONE BUTTON FOR EMERGENCY ACTION.



USB PORT CHARGER

STAY CONNECTED WITH A QUICK, RELIABLE CHARGE EVERY TIME.




DUAL-STEPPED SEAT

KEEP THE RIDER SECURE WITH BETTER SUPPORT AND MORE STABLE SEATING POSITION.



SPORTY EXHAUST

STREET-READY STYLE WITH RAW, POWERFUL VIBES.

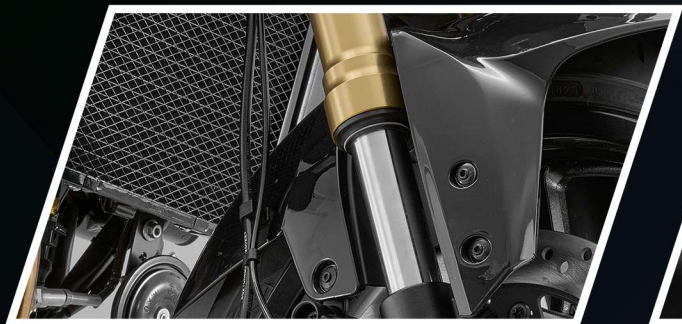

TELESCOPIC UPSIDE DOWN FRONT FORKS

DELIVERING A STIFFER AND MORE PRECISE RIDE FEEL, ESPECIALLY UNDER BRAKING.



ADJUSTABLE MONOSHOCK

ENABLES DAMPING ADJUSTMENT FOR RIDE COMFORT AND CONTROL.




FUEL TANK CAPACITY 12.5-LITRE

PERFECT FOR LONG RIDES WITHOUT CONSTANTLY PULLING OVER FOR A TOP-UP.



DIGITAL PANEL METER

DISPLAYS PRECISE INFO ON A CLEAR AND EASY-TO-READ SCREEN.

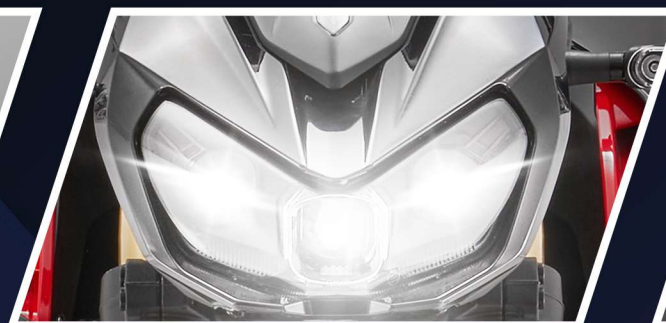

LED HEADLIGHT + DRL

DAY OR NIGHT, OTHERS DRIVERS WON'T MISS YOU COMING.



BRIGHT AND STYLISH LED TAIL LIGHT

BE SEEN. STAY SAFE. LOOK SHARP.

Distributed by



MFORCE BIKE HOLDINGS SDN. BHD.(751410-H)

1485, Jalan Seruling, Kawasan Perindustrian Valdor, 14200 Sungai Jawi, Pulau Pinang, Malaysia.

Tel: 604-545 2222 | Fax: 604-545 2288 | Email: help@mforce.my